

BENCHTOP TUMBLING BASES

Benchtop Bases

- Glossy white reinforced fiberglass base.
- Wet or dry tumbling, made for industrial use.
- Solid steel bars, cast in urethane and precision ground.
- Available in 2 speed or variable speed.
- Great for deburring small parts.
- Easy to separate.
- Inexpensive steel ball burnishing solution.
- Can run different size barrels at the same time.

Mini-Max 2 Bar Tumbler Base

- Dimensions:
length 23" x width 16" x height 13"
- Bar Length: 9.25"
- Inside Bar Spacing: 4.5"
- Bar Diameter: 1"
- Motor: 1/3 HP, 120 V, 60 Hz*
- RPM: 1725 / 1140



Mini-Max

Shown with two TL-2 barrels. Barrels sold separately.



Shown with one TL-4 barrels and two TL-3 barrels. Barrels sold separately.


2 Bar

2 Bar Tumbler Base

- Dimensions:
length 36" x width 19" x height 13"
- Bar Length: 24"
- Inside Bar Spacing: 7.5"
- Bar Diameter: 1"
- Motor: 1/3 HP, 120 V, 60 Hz*
- RPM: 1725 / 1140

3 Bar Tumbler Base

- Dimensions:
length 36" x width 19" x height 13"
- Bar Length: 24"
- Inside Bar Spacing: 3.5"
- Bar Diameter: 1"
- Motor: 1/3 HP, 120 V, 60 Hz*
- RPM: 1725 / 1140

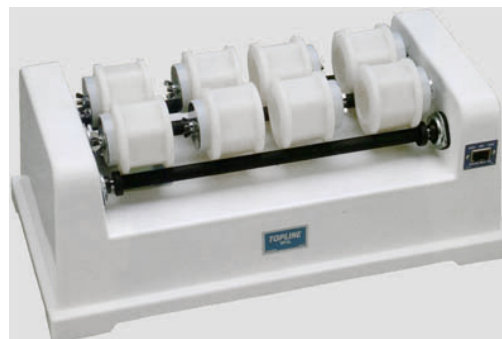

3 Bar

Shown with eight TL-1 barrels. Barrels sold separately.

***All machines are available in 220 V, 50 Hz**

BENCHTOP TUMBLING BARRELS

Benchtop Barrels

- Made from high density polyethylene(HDPE) plastic.
- covers are made of stainless steel, with neoprene expansion plugs.
- positive lock and seal allowing easy access.



	TL-1	TL-2	TL-3	TL-4	TL-6
Physical Characteristics:					
Total Capacity	22 fl.oz.	3.5 qts.	1.5 gal.	2.5 gal.	8.0 gal.
Net Weight	1.5 lbs.	2.5 lbs.	3.0 lbs.	4.0 lbs.	9.0 lbs.
Diameter	4.75"	8.25"	10.0"	10.75"	15.75"
Height	4.75"	4.375"	7.0"	10.5"	14.75"
Barrel Opening	3"	4"	4"	4"	7.25"

Barrel RPMs on high or low speed setting:

Low	29	36	29	25	18
High	44	54	43	40	27

Maximum Barrels per base:

Mini-Max	2	2	1	1	0
2-Bar	0	4	3	2	1
3Bar	8	0	0	0	0

RCM
deburring. inc.

RCM Deburring, Inc.
26893 Bouquet Canyon Rd.
Suite C-172
Santa Clarita, CA 91350

www.rcmdeburring.com
email: sales@rcmdeburring.com
telephone: 661 • 296 • 9611
fax: 661 • 296 • 9184